




P39

双作用活塞组合密封

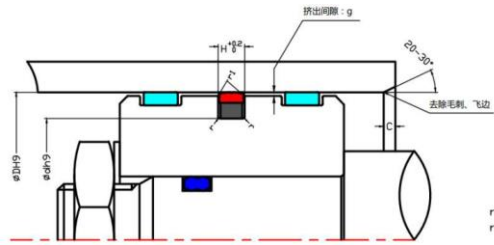

	滑环	弹性体
材料:	PU-75595	NBR
硬度:	HA 95	HA 75
TR-10:	-25℃	-25℃
最高使用温度:	120℃	100℃
速度:	0.03~0.5m/s	
工作介质:	液压油、水、醇类	

- 缸筒内表面应进行0.8~1.6μm的抛光。
- 相比传统的格莱圈，P39采用矩形弹性体，使其在沟槽内有更好的稳定性。

d(mm)	D(mm)	H(mm)
25	17.5	3.2
25	14	4.2
32	24.5	3.2
32	21	4.2
40	32.5	3.2
40	29	4.2
45	34	4.2
45	32	6.3
50	39	4.2
50	34.5	6.3
55	39.5	6.3
60	49	4.2
60	44.5	6.3
63	52	4.2
63	47.5	6.3
63	50	6.3
65	52	6.3
70	59	4.2
70	54.5	6.3
70	57	6.3
75	59.5	6.3
75	62	6.3
80	64.5	6.3
85	71.5	6.3
90	74.5	6.3
90	69	8.1
90	69	8.1
95	79.5	6.3

d(mm)	D(mm)	H(mm)
100	84.5	6.3
100	86.5	6.3
100	79	8.1
105	84.5	6.3
105	89.5	6.3
110	89	8.1
115	94	8.1
120	99	8.1
125	109.5	6.3
125	104	8.1
140	119	8.1
160	139	8.1
200	179	8.1