




P51

双作用耐高压组合密封

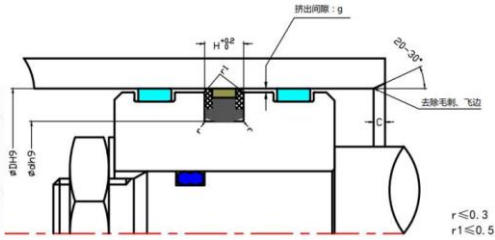

	滑环	弹性体	挡圈
材料:	CUPTFE	NBR	PA
硬度:	HD 65	HA 70	HD 80
TR-10:	-	-25°C	-
最高使用温度:	200	100	100
速度:	0.05~1.5m/s		
工作介质:	液压油、水、醇类		

- 缸筒内表面应进行0.8~1.6μm的抛光。
- 适用于高频、高速的工况。

D(mm)	d(mm)	S(mm)	H(mm)
40	30	7.5	8
50	36	8.5	9
55	41	8.5	9
60	46	8.5	9
63	48	10.5	11
65	50	10.5	11
70	55	10.5	11
75	60	10.5	11
80	65	10.5	11
85	70	10.5	11
90	75	10.5	11
95	80	10.5	11
100	85	12	12.5
105	90	12	12.5
110	95	12	12.5
115	100	12	12.5
120	105	12	12.5
125	102	15.5	16
130	107	15.5	16
135	112	15.5	16
140	117	15.5	16
145	122	15.5	16
150	127	15.5	16
155	132	15.5	16
160	137	15.5	16
165	142	15.5	16
170	147	15.5	16
175	152	15.5	16
180	157	15.5	16

D(mm)	d(mm)	S(mm)	H(mm)
185	162	15.5	16
190	167	15.5	16
195	172	15.5	16
200	177	15.5	16
210	187	15.5	16
220	197	15.5	16
225	202	15.5	16
230	207	15.5	16
240	217	15.5	16
250	222	17	17.5
260	232	17	17.5
270	242	17	17.5
280	252	17	17.5
290	262	17	17.5
300	272	17	17.5
310	282	17	17.5
320	292	17	17.5
330	302	17	17.5