




# P51A

## 双作用耐高压组合密封

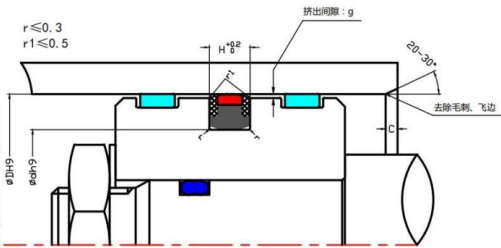

|         | 滑环          | 弹性体   | 挡圈    |
|---------|-------------|-------|-------|
| 材料:     | PU-75595    | NBR   | PA    |
| 硬度:     | HA 95       | HA 70 | HD 80 |
| TR-10:  | -25℃        | -25℃  | -     |
| 最高使用温度: | 120         | 100   | 100   |
| 速度:     | 0.03~0.5m/s |       |       |
| 工作介质:   | 液压油、水、醇类    |       |       |

- 缸筒内表面应进行0.8~1.6μm的抛光。
- 相比传统的SPGW组合密封，P51A有更好的保压性能，适用于速度 < 0.5m/s的工况。

| D(mm) | d(mm) | S(mm) | H(mm) |
|-------|-------|-------|-------|
| 40    | 30    | 7.5   | 8     |
| 50    | 36    | 8.5   | 9     |
| 55    | 41    | 8.5   | 9     |
| 60    | 46    | 8.5   | 9     |
| 63    | 48    | 10.5  | 11    |
| 65    | 50    | 10.5  | 11    |
| 70    | 55    | 10.5  | 11    |
| 75    | 60    | 10.5  | 11    |
| 80    | 65    | 10.5  | 11    |
| 85    | 70    | 10.5  | 11    |
| 90    | 75    | 10.5  | 11    |
| 95    | 80    | 10.5  | 11    |
| 100   | 85    | 12    | 12.5  |
| 105   | 90    | 12    | 12.5  |
| 110   | 95    | 12    | 12.5  |
| 115   | 100   | 12    | 12.5  |
| 120   | 105   | 12    | 12.5  |
| 125   | 102   | 15.5  | 16    |
| 130   | 107   | 15.5  | 16    |
| 135   | 112   | 15.5  | 16    |
| 140   | 117   | 15.5  | 16    |
| 145   | 122   | 15.5  | 16    |
| 150   | 127   | 15.5  | 16    |
| 155   | 132   | 15.5  | 16    |
| 160   | 137   | 15.5  | 16    |
| 165   | 142   | 15.5  | 16    |
| 170   | 147   | 15.5  | 16    |
| 175   | 152   | 15.5  | 16    |
| 180   | 157   | 15.5  | 16    |

| D(mm) | d(mm) | S(mm) | H(mm) |
|-------|-------|-------|-------|
| 185   | 162   | 15.5  | 16    |
| 190   | 167   | 15.5  | 16    |
| 195   | 172   | 15.5  | 16    |
| 200   | 177   | 15.5  | 16    |
| 210   | 187   | 15.5  | 16    |
| 220   | 197   | 15.5  | 16    |
| 225   | 202   | 15.5  | 16    |
| 230   | 207   | 15.5  | 16    |
| 240   | 217   | 15.5  | 16    |
| 250   | 222   | 17    | 17.5  |
| 260   | 232   | 17    | 17.5  |
| 270   | 242   | 17    | 17.5  |
| 280   | 252   | 17    | 17.5  |
| 290   | 262   | 17    | 17.5  |
| 300   | 272   | 17    | 17.5  |
| 310   | 282   | 17    | 17.5  |
| 320   | 292   | 17    | 17.5  |
| 330   | 302   | 17    | 17.5  |