




# PS01A

## 带储油槽与泄压槽的活塞密封



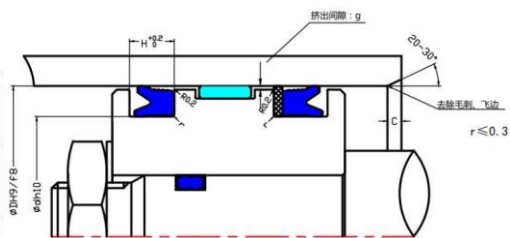


材料:	PU-15594
硬度:	HA 93
TR-10:	-42°C
最高使用温度:	100°C
速度:	0.03~0.5m/s
工作介质:	液压油、水、醇类

- 缸筒内表面应进行0.8~1.6μm的抛光。
- 带储油槽结构设计有效降低摩擦力。
- 带泄油槽设计有效避免背压产生
- 若需加挡圈，则H+挡圈高度即可

D(mm)	d(mm)	S(mm)	H(mm)
40	30	6	7
40	32	10	11
41.275	50.8	7.95	8.95
45	37	10	11
50	35	9	10
50	35	10	11
50	40	6	7
50	42	10	11
55	45	6	7
55	45	7.3	8.3
55	47	10	11
56	45	7	8
60	45	7	8
60	48	14	15
60	50	6	7
60	50	7.3	8.3
60	50	9	10
60	50	10	11
63	53	6	7
63	48	9	10
63	48	10	11
63	53	8	9
63	53	7.3	8.3
63	51	14	15
65	55	6	7
65	55	7.3	8.3
70	60	7	8
70	60	8	9
70	60	6	7
70	58	14	15

D(mm)	d(mm)	S(mm)	H(mm)
75	65	7	8
75	60	9	10
75	55	10	11
80	65	10	11
80	65	9	10
80	65	11.4	12.4
80	70	6	7
80	70	7	8
80	70	8	9
80	68	14	15
85	70	9	10
85	75	6	7
90	75	10	11
90	75	9	10
90	80	6	7
90	75	11.4	12.4
90	78	14	15
95	80	10	11
100	85	9	10
100	80	10	11
100	80	12	13
100	85	11.4	12.4
100	90	7	8
100	88	14	15
105	90	9	10
110	95	9	10
110	100	8	9
110	90	12	13
110	98	14	15
115	100	9	10
115	95	12	13

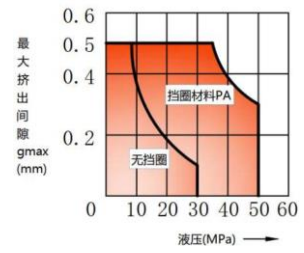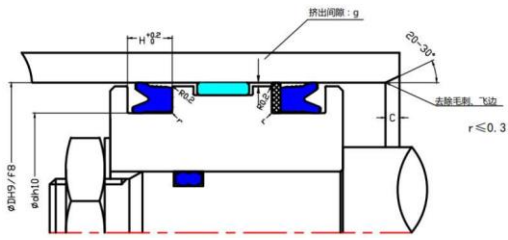

D(mm)	d(mm)	S(mm)	H(mm)
120	105	9	10
120	100	12	13
125	105	14.5	15.5
125	110	9	10
125	113	14	15
130	114	18	20
130	115	9	10
130	110	12	13
140	125	9	10
140	120	12	13
145	125	12	13
150	130	14.5	15.5
150	134	18	20
150	135	9	10
160	140	12	13
160	140	14.5	15.5
160	144	18	20
180	164	18	20
200	184	18	20
220	204	18	20
250	234	18	20