




PS-08F & PS08-FP

双作用活塞组合密封

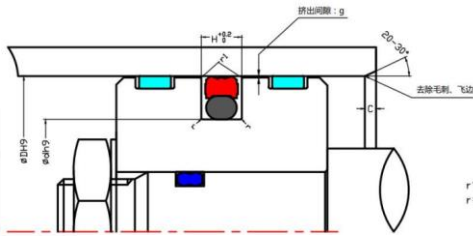

滑环材料可三选一




O圈材料二选一

材料:	PU-75560*	PU-75595	CUPTFE*	NBR	FKM
硬度:	HD 60	HA 95	HD 65	HA 70	HA 70
TR-10:	-25°C	-25°C	-	-25°C	-15°C
最高使用温度	120°C	120°C	200°C	100°C	200°C
速度m/s:	PU滑环 (0.03~0.5) PTFE滑环 (0.01~3)				
工作介质:	*不同组合的耐介质, 参照材料对照表				

- 缸筒内表面应进行0.8~1.6μm的抛光。
- 相比传统的格莱圈, PS08F有更好的保压效果, 适用于速度低于0.5m/s的工况。

D(mm)	d(mm)	H(mm)	O圈id	O圈Wd
12	7.1	2.2	6.8	1.9
15	7.5	3.2	7.1	2.65
16	8.5	3.2	8	2.65
16	11.1	2.2	10.82	1.78
18	10.5	3.2	10	2.65
20	12.5	3.2	12.37	2.62
20	15.1	2.2	15	1.8
22	14.5	3.2	13.95	2.62
24	16.5	3.2	15.54	2.65
25	17.5	3.2	17.12	2.62
25	20.1	2.2	20	1.8
25	14	4.2	13.87	3.53
28	20.5	3.2	20.29	2.62
30	22.5	3.2	21.89	2.62
32	24.5	3.2	23.47	2.62
32	27.1	2.2	26.7	1.78
32	21	4.2	20.22	3.53
35	27.5	3.2	26.65	2.62
36	28.5	3.2	28.25	2.62
39	31.5	3.2	31.42	2.62
40	32.5	3.2	31.42	2.62
40	29	4.2	28.17	3.53
42	31	4.2	29.74	3.53
45	34	4.2	32.92	3.53
48	37	4.2	36.09	3.53
50	42.5	3.2	40.95	2.62
50	39	4.2	37.67	3.53
50	34.5	6.3	32.69	5.33
52	36.5	6.3	34.29	5.33
52	41	4.2	40.87	3.53

D(mm)	d(mm)	H(mm)	O圈id	O圈Wd
55	44	4.2	43.7	3.55
55	39.5	6.3	37.47	5.33
56	48.5	3.2	47.3	2.62
56	45	4.2	44.04	3.53
56	40.5	6.3	40	5.3
60	49	4.2	47.22	3.53
60	44.5	6.3	43.82	5.33
63	52	4.2	50.39	3.53
63	55.5	3.2	54.5	2.65
63	47.5	6.3	46.2	5.3
63.5	48	6.3	46.99	5.33
65	54	4.2	53.57	3.53
65	49.5	6.3	48.7	5.3
70	54.5	6.3	53.34	5.33
70	57	6.3	53	5.3
70	62.5	3.2	61.6	2.62
70	59	4.2	58	3.55
75	64	4.2	63.09	3.53
75	59.5	6.3	58	5.3
80	69	4.2	67	3.55
80	64.5	6.3	62.87	5.33
80	59	8.1	56.52	6.99
85	69.5	6.3	69.22	5.33
90	74.5	6.3	73	5.3
95	79.5	6.3	78.74	5.33
100	84.5	6.3	82.5	5.3
100	89	4.2	88.49	3.53
100	79	8.1	78.74	6.99
105	89.5	6.3	88.27	5.33
110	94.5	6.3	92.5	5.3
110	99	4.2	98.02	3.53

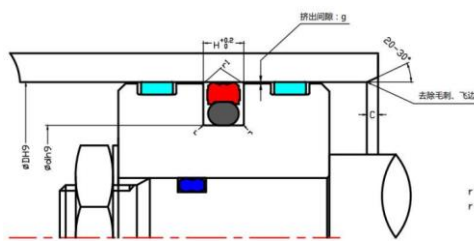

D(mm)	d(mm)	H(mm)	O圈id	O圈Wd
115	99.5	6.3	97.79	5.33
115	94	8.1	91.44	6.99
120	99	8.1	97.79	6.99
120	104.5	6.3	103	5.3
125	109.5	6.3	107.32	5.33
125	114	4.2	112	3.55
125	104	8.1	100.97	6.99
130	114.5	6.3	113.67	5.33
130	109	8.1	107.32	6.99
135	114	8.1	113.67	6.99
135	119.5	6.3	118	5.3
140	124.5	6.3	123.19	5.33
140	119	8.1	117	7
145	129.5	6.3	128	5.3
145	124	8.1	122	7
150	129	8.1	126.37	6.99
150	134.5	6.3	132.72	5.33
155	134	8.1	132	7
160	139	8.1	135.89	6.99
160	144.5	6.3	142.24	5.33
165	144	8.1	142.24	6.99
170	149	8.1	148.59	6.99
170	154	8.1	151.77	6.99
175	154	8.1	151.77	6.99
180	159	8.1	158.12	6.99
180	164.5	6.3	164.47	5.33
185	164	8.1	160	7
190	174.5	6.3	170.82	5.33
190	169	8.1	164.47	6.99
195	174	8.1	172	7
200	184.5	6.3	183.52	5.33
200	179	8.1	177.17	6.99
205	184	8.1	183.52	6.99
210	189	8.1	186	7
220	204.5	6.3	202.57	5.33
220	199	8.1	196.22	6.99
225	204	8.1	202.57	6.99
230	209	8.1	206	7
240	219	8.1	218	7
250	225.5	8.1	224	7
250	229	8.1	227.97	6.99
260	239	8.1	236	7
270	249	8.1	247	7
280	255.5	8.1	253.37	6.99
280	259	8.1	258	7
290	269	8.1	266.06	6.99
300	275.5	8.1	272	7
300	279	8.1	276	7
320	299	8.1	295	7
330	305.5	8.1	304.17	6.99
340	315.5	8.1	315.00	7.00
350	325.5	8.1	325.00	7.00

D(mm)	d(mm)	H(mm)	O圈id	O圈Wd
360	335.5	8.1	335.00	7.00
370	345.5	8.1	345.00	7.00
380	355.5	8.1	355.00	7.00
390	365.5	8.1	365.00	7.00
400	375.5	8.1	367.67	6.99
410	385.5	8.1	380.37	6.99
420	395.5	8.1	393.07	6.99
430	405.5	8.1	405.26	6.99
440	415.5	8.1	412.00	7.00
450	425.5	8.1	425.00	7.00
460	435.5	8.1	430.66	6.99
470	445.5	8.1	443.36	6.99
480	455.5	8.1	456.06	6.99
490	465.5	8.1	462.00	7.00
500	475.5	8.1	475.00	7.00
510	485.5	8.1	487.00	7.00
520	495.5	8.1	494.16	6.99
530	505.5	8.1	506.86	6.99
540	515.5	8.1	515.00	7.00
550	525.5	8.1	515.00	7.00
560	535.5	8.1	535.00	7.00
570	545.5	8.1	545.00	7.00
580	555.5	8.1	557.66	6.99
590	565.5	8.1	560.00	7.00
600	575.5	8.1	580.00	7.00
610	585.5	8.1	582.68	6.99
620	595.5	8.1	600.00	7.00
630	605.5	8.1	608.08	6.99
640	615.5	8.1	608.08	6.99
650	625.5	8.1	633.48	6.99
660	635.5	8.1	633.48	6.99
670	642	9.5	635.00	8.40
680	652	9.5	645.00	8.40
690	662	9.5	655.00	8.40

英制尺寸 (INCH)

D(in)	d(in)	H(in)
1.250	0.974	0.126
1.375	1.079	0.126
1.500	1.067	0.165
1.500	1.204	0.125
2.000	1.567	0.165
2.500	2.067	0.165
2.750	2.140	0.248
2.750	2.318	0.165
3.250	2.640	0.248
4.000	3.390	0.248
5.000	4.390	0.248