




# RS-02C

## 聚氨酯缓冲环

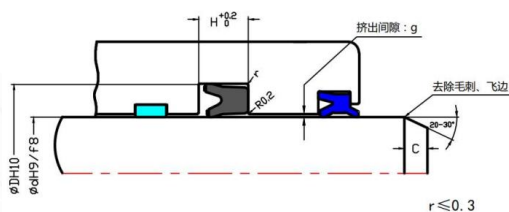

	密封材料	挡圈材料
材料:	PU-75595	PA
硬度:	HA 95	HD 75
TR-10:	-25°C	-
最高使用温度:	120°C	120°C
速度:	0.03~0.5m/s	
工作介质:	液压油、水、醇类	

- 活塞杆表面应进行0.1~0.4mRa的抛光
- 适用于挖机、破碎锤等高压高速工况

d(mm)	D(mm)	s(mm)	H(mm)
40	55.5	6	6.3
45	60.5	6	6.3
50	65.5	6	6.3
70	85.5	6	6.3
70	85.5	6	6.3
75	90.5	6	6.3
75.5	60	6	6.3
80	95.5	6	6.3
80.5	65	6	6.3
85	100.5	6	6.3
90	105.5	6	6.3
95	110.5	6	6.3
95.5	80	6	6.3
100	115.5	6	6.3
100	115.5	6	6.3
105	120.5	6	6.3
110	125.5	6	6.3
115	130.5	6	6.3
120	135.5	6	6.3
125	140.5	6	6.3
130	145.5	6	6.3
130	145.5	6	6.3
135	150.5	6	6.3
140	155.5	6	6.3
145	160.5	6	6.3

d(mm)	D(mm)	s(mm)	H(mm)
150	165.5	6	6.3
155	170.5	6	6.3
160	175.5	6	6.3
165	180.5	6	6.3
170	185.5	6	6.3
175	190.5	6	6.3
180	195.5	6	6.3
185	200.5	6	6.3
190	205.5	6	6.3
195	210.5	6	6.3
200	221	7.7	8