




RS-09B

轴用组合密封



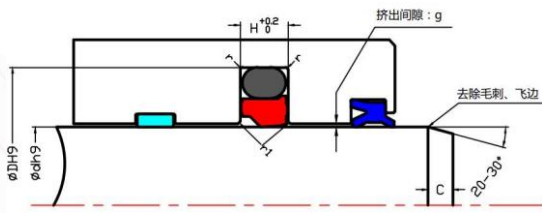


| 滑环材料二选一 | | O圈材料二选一 | |
|---------|---------------------------------|---------|-----------|
| 材料: | PU-75560* CUPTFE | NBR | FKM |
| 硬度: | HD 60 HD 65 | HA 70 | HA 70 |
| TR-10: | -25℃ | - | -25℃ -15℃ |
| 最高使用温度: | 120℃ | 200℃ | 100℃ 200℃ |
| 速度m/s: | PU滑环 (0.03~0.5) PTFE滑环 (0.01~3) | | |
| 工作介质: | *不同组合的耐介质, 参照材料对照表 | | |

- 活塞杆表面应进行0.1~0.4mRa的抛光
- 在速度 < 0.5m/s的工况下, 采用PU作为滑环比传统PTFE有更好的密封性




| d(mm) | D(mm) | H(mm) | O圈id | O圈Wd |
|-------|-------|-------|-------|------|
| 4 | 8.9 | 2.2 | 5.6 | 1.8 |
| 5 | 9.9 | 2.2 | 6.7 | 1.8 |
| 7 | 11.9 | 2.2 | 8.75 | 1.8 |
| 7.1 | 12 | 2.2 | 8.75 | 1.8 |
| 8 | 15.3 | 3.2 | 10.77 | 2.62 |
| 10 | 17.3 | 3.2 | 12.37 | 2.62 |
| 12 | 19.3 | 3.2 | 13.94 | 2.62 |
| 14 | 18.9 | 2.2 | 15.6 | 1.78 |
| 14 | 21.3 | 3.2 | 17.12 | 2.62 |
| 15 | 22.3 | 3.2 | 17.12 | 2.62 |
| 16 | 20.9 | 2.2 | 17.17 | 1.78 |
| 16 | 23.3 | 3.2 | 18.72 | 2.62 |
| 18 | 22.9 | 2.2 | 19 | 1.8 |
| 18 | 25.3 | 3.2 | 20.29 | 2.62 |
| 20 | 27.3 | 3.2 | 21.89 | 2.62 |
| 20 | 30.7 | 4.2 | 23.39 | 3.53 |
| 20 | 31 | 4.2 | 23.39 | 3.53 |
| 22 | 29.3 | 3.2 | 25.07 | 2.62 |
| 22 | 32.7 | 4.2 | 26.57 | 3.53 |
| 22 | 33 | 4.2 | 26.57 | 3.53 |
| 24 | 34.7 | 4.2 | 28.17 | 3.53 |
| 25 | 32.3 | 3.2 | 26.65 | 2.62 |
| 25 | 35.7 | 4.2 | 29.74 | 3.53 |
| 25 | 36 | 4.2 | 29.74 | 3.53 |
| 26 | 36.7 | 4.2 | 29.74 | 3.53 |
| 28 | 35.3 | 3.2 | 30 | 2.65 |
| 28 | 38.7 | 4.2 | 32.92 | 3.53 |
| 28 | 39 | 4.2 | 32.92 | 3.53 |
| 30 | 37.3 | 3.2 | 33 | 2.62 |
| 30 | 40.7 | 4.2 | 34.5 | 3.55 |
| 30 | 41 | 4.2 | 34.5 | 3.55 |

| d(mm) | D(mm) | H(mm) | O圈id | O圈Wd |
|-------|-------|-------|-------|------|
| 32 | 39.3 | 3.2 | 34.6 | 2.62 |
| 32 | 42.7 | 4.2 | 36.09 | 3.53 |
| 32 | 43 | 4.2 | 36.09 | 3.53 |
| 35 | 42.3 | 3.2 | 37.77 | 2.62 |
| 35 | 45.7 | 4.2 | 38.7 | 3.55 |
| 35 | 46 | 4.2 | 38.7 | 3.55 |
| 36 | 43.3 | 3.2 | 39.35 | 2.62 |
| 36 | 46.7 | 4.2 | 40.87 | 3.53 |
| 36 | 47 | 4.2 | 40.87 | 3.53 |
| 37 | 47.7 | 4.2 | 40.87 | 3.53 |
| 38 | 53.1 | 6.3 | 43.82 | 5.33 |
| 40 | 50.7 | 4.2 | 44.04 | 3.53 |
| 40 | 55.1 | 6.3 | 45 | 5.3 |
| 40 | 55.5 | 6.3 | 45 | 5.3 |
| 42 | 57.1 | 6.3 | 46.99 | 5.33 |
| 43 | 58.5 | 6.3 | 50.17 | 5.33 |
| 45 | 55.7 | 4.2 | 50.39 | 3.53 |
| 45 | 60.1 | 6.3 | 50.17 | 5.33 |
| 45 | 60.5 | 6.3 | 50.17 | 5.33 |
| 48 | 63.1 | 6.3 | 53.34 | 5.33 |
| 50 | 60.7 | 4.2 | 53.57 | 3.53 |
| 50 | 65.1 | 6.3 | 56.52 | 5.33 |
| 50 | 65.5 | 6.3 | 56.52 | 5.33 |
| 52 | 67.1 | 6.3 | 56.52 | 5.33 |
| 55 | 70.1 | 6.3 | 59.69 | 5.33 |
| 56 | 66.7 | 4.2 | 59.92 | 3.53 |
| 56 | 71.1 | 6.3 | 61.5 | 5.3 |
| 56 | 71.5 | 6.3 | 61.5 | 5.3 |
| 60 | 70.7 | 4.2 | 63.09 | 3.53 |
| 60 | 75.1 | 6.3 | 66.04 | 5.33 |
| 60 | 75.5 | 6.3 | 66.04 | 5.33 |

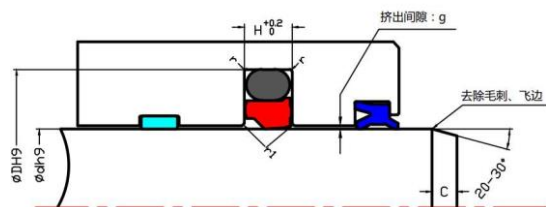

| d(mm) | D(mm) | H(mm) | O圈id | O圈Wd |
|-------|-------|-------|--------|------|
| 63 | 73.7 | 4.2 | 66.27 | 3.53 |
| 63 | 78.5 | 6.3 | 69.22 | 5.33 |
| 65 | 80.1 | 6.3 | 69.22 | 5.33 |
| 65 | 80.5 | 6.3 | 69.22 | 5.33 |
| 70 | 80.7 | 4.2 | 75.8 | 3.53 |
| 70 | 85.1 | 6.3 | 75.57 | 5.33 |
| 70 | 85.5 | 6.3 | 75.57 | 5.33 |
| 75 | 90.1 | 6.3 | 81.92 | 5.33 |
| 75 | 90.5 | 6.3 | 81.92 | 5.33 |
| 78 | 93.5 | 6.3 | 85.09 | 5.33 |
| 80 | 90.7 | 4.2 | 85.32 | 3.53 |
| 80 | 95.1 | 6.3 | 85.09 | 5.33 |
| 80 | 95.5 | 6.3 | 85.09 | 5.33 |
| 85 | 100.1 | 6.3 | 91.44 | 5.33 |
| 85 | 100.5 | 6.3 | 91.44 | 5.33 |
| 90 | 100.7 | 4.2 | 94.84 | 3.53 |
| 90 | 105.1 | 6.3 | 94.62 | 5.33 |
| 90 | 105.5 | 6.3 | 94.62 | 5.33 |
| 90 | 110.5 | 8.1 | 97.79 | 6.99 |
| 95 | 110.1 | 6.3 | 100.97 | 5.33 |
| 95 | 110.5 | 6.3 | 100.97 | 5.33 |
| 97 | 112.5 | 6.3 | 100.97 | 5.33 |
| 100 | 110.7 | 4.2 | 104.37 | 3.53 |
| 100 | 115.1 | 6.3 | 107.32 | 5.33 |
| 100 | 115.5 | 6.3 | 104.14 | 5.33 |
| 100 | 120.5 | 8.1 | 107.32 | 6.99 |
| 105 | 120.5 | 6.3 | 110.49 | 5.33 |
| 110 | 120.7 | 4.2 | 113.89 | 3.53 |
| 110 | 125.1 | 6.3 | 116.84 | 5.33 |
| 110 | 125.5 | 6.3 | 116.84 | 5.33 |
| 110 | 130.5 | 8.1 | 116.84 | 6.99 |
| 115 | 130.5 | 6.3 | 120.02 | 5.33 |
| 120 | 130.7 | 4.2 | 126.6 | 3.53 |
| 120 | 135.1 | 6.3 | 126.37 | 5.33 |
| 120 | 135.5 | 6.3 | 126.37 | 5.33 |
| 120 | 140.5 | 8.1 | 129.54 | 6.99 |
| 125 | 135.7 | 4.2 | 129.77 | 3.53 |
| 125 | 140.1 | 6.3 | 129.54 | 5.33 |
| 125 | 140.5 | 6.3 | 129.54 | 5.33 |
| 125 | 145.5 | 8.1 | 132.72 | 6.99 |
| 130 | 140.7 | 4.2 | 136.12 | 3.53 |
| 130 | 145.1 | 6.3 | 135.89 | 5.33 |
| 130 | 145.5 | 6.3 | 135.89 | 5.33 |
| 130 | 150.5 | 8.1 | 139.07 | 6.99 |
| 135 | 150.5 | 6.3 | 142.24 | 5.33 |
| 140 | 150.7 | 4.2 | 145.64 | 3.53 |
| 140 | 155.1 | 6.3 | 145.42 | 5.33 |
| 140 | 155.5 | 6.3 | 145.42 | 5.33 |
| 140 | 160.5 | 8.1 | 148.59 | 6.99 |
| 145 | 160.5 | 6.3 | 151.77 | 5.33 |
| 150 | 165.1 | 6.3 | 158.12 | 5.33 |
| 150 | 165.5 | 6.3 | 158.12 | 5.33 |
| 155 | 170.1 | 6.3 | 164.47 | 5.33 |

| d(mm) | D(mm) | H(mm) | O圈id | O圈Wd |
|---------------------------|-------|-------|--------|------|
| 160 | 175.1 | 6.3 | 164.47 | 5.33 |
| 160 | 175.5 | 6.3 | 164.47 | 5.33 |
| 165 | 180.1 | 6.3 | 170.82 | 5.33 |
| 170 | 185.1 | 6.3 | 177.17 | 5.33 |
| 175 | 190.1 | 6.3 | 183.52 | 5.33 |
| 180 | 195.1 | 6.3 | 183.52 | 5.33 |
| 185 | 200.1 | 6.3 | 189.87 | 5.33 |
| 190 | 205.1 | 6.3 | 196.22 | 5.33 |
| 195 | 210.1 | 6.3 | 202.57 | 5.33 |
| 200 | 220.5 | 8.1 | 206 | 7 |
| 210 | 230.5 | 8.1 | 215.27 | 6.99 |
| 220 | 240.5 | 8.1 | 227.97 | 6.99 |
| 225 | 245.5 | 8.1 | 236 | 7 |
| 230 | 250.5 | 8.1 | 240.67 | 6.99 |
| 240 | 260.5 | 8.1 | 253.37 | 6.99 |
| 250 | 270.5 | 8.1 | 258 | 7 |
| 260 | 284 | 8.1 | 272 | 7 |
| 270 | 294 | 8.1 | 278.77 | 6.99 |
| 280 | 304 | 8.1 | 291.47 | 6.99 |
| 290 | 314 | 8.1 | 304.17 | 6.99 |
| 300 | 324 | 8.1 | 315 | 7 |
| d大于300mm, RS09B聚氨酯材质为车削加工 | | | | |
| 310 | 334 | 8.1 | 316.87 | 6.99 |
| 320 | 344 | 8.1 | 329.57 | 6.99 |
| 330 | 354 | 8.1 | 335 | 7 |
| 340 | 364 | 8.1 | 345 | 7 |
| 350 | 374 | 8.1 | 355 | 7 |
| 360 | 384 | 8.1 | 367.67 | 6.99 |
| 365 | 389 | 8.1 | 380.37 | 6.99 |
| 370 | 394 | 8.1 | 380.37 | 6.99 |
| 375 | 399 | 8.1 | 380.37 | 6.99 |
| 380 | 404 | 8.1 | 393.07 | 6.99 |
| 390 | 414 | 8.1 | 400 | 7 |
| 400 | 424 | 8.1 | 412 | 7 |
| 410 | 434 | 8.1 | 425 | 7 |
| 420 | 444 | 8.1 | 437 | 7 |
| 430 | 454 | 8.1 | 443.36 | 6.99 |
| 440 | 464 | 8.1 | 450 | 7 |
| 450 | 474 | 8.1 | 462 | 7 |
| 460 | 484 | 8.1 | 475 | 7 |
| 470 | 494 | 8.1 | 481.46 | 6.99 |
| 480 | 504 | 8.1 | 494.16 | 6.99 |
| 490 | 514 | 8.1 | 500 | 7 |
| 500 | 524 | 8.1 | 515 | 7 |
| 510 | 534 | 8.1 | 515 | 7 |
| 520 | 544 | 8.1 | 535 | 7 |
| 530 | 554 | 8.1 | 545 | 7 |
| 540 | 564 | 8.1 | 557.66 | 6.99 |
| 550 | 574 | 8.1 | 560 | 7 |
| 560 | 584 | 8.1 | 580 | 7 |
| 570 | 594 | 8.1 | 582.68 | 6.99 |
| 580 | 604 | 8.1 | 590 | 7 |
| 590 | 614 | 8.1 | 600 | 7 |

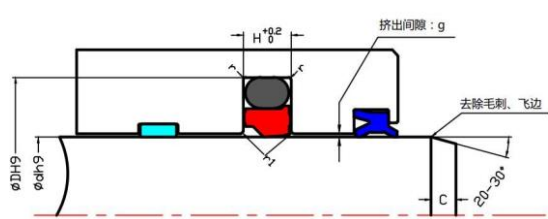

| d(mm) | D(mm) | H(mm) | O圈id | O圈Wd |
|-------|--------|-------|--------|------|
| 610 | 634 | 8.1 | 620 | 7 |
| 620 | 644 | 8.1 | 633.48 | 6.99 |
| 630 | 654 | 8.1 | 640 | 7 |
| 640 | 664 | 8.1 | 650 | 7 |
| 650 | 677.3 | 9.5 | 663 | 8.4 |
| 656 | 683.3 | 9.5 | 669 | 8.4 |
| 660 | 687.3 | 9.5 | 673 | 8.4 |
| 680 | 707.3 | 9.5 | 693 | 8.4 |
| 685 | 712.3 | 9.5 | 698 | 8.4 |
| 700 | 727.3 | 9.5 | 713 | 8.4 |
| 710 | 737.3 | 9.5 | 723 | 8.4 |
| 730 | 757.3 | 9.5 | 743 | 8.4 |
| 760 | 787.3 | 9.5 | 773 | 8.4 |
| 780 | 807.3 | 9.5 | 793 | 8.4 |
| 790 | 817.3 | 9.5 | 803 | 8.4 |
| 800 | 827.3 | 9.5 | 813 | 8.4 |
| 810 | 837.3 | 9.5 | 823 | 8.4 |
| 820 | 847.3 | 9.5 | 833 | 8.4 |
| 830 | 857.3 | 9.5 | 843 | 8.4 |
| 850 | 877.3 | 9.5 | 863 | 8.4 |
| 870 | 897.3 | 9.5 | 883 | 8.4 |
| 880 | 907.3 | 9.5 | 893 | 8.4 |
| 885 | 912.3 | 9.5 | 898 | 8.4 |
| 890 | 917.3 | 9.5 | 903 | 8.4 |
| 900 | 927.3 | 9.5 | 913 | 8.4 |
| 930 | 957.3 | 9.5 | 943 | 8.4 |
| 955 | 982.3 | 9.5 | 968 | 8.4 |
| 1050 | 1077.3 | 9.5 | 1063 | 8.4 |