
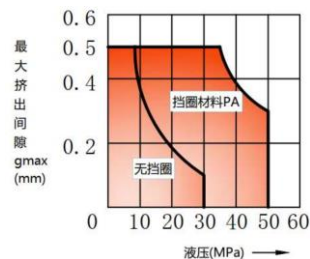



RS-17

带副唇的活塞杆密封


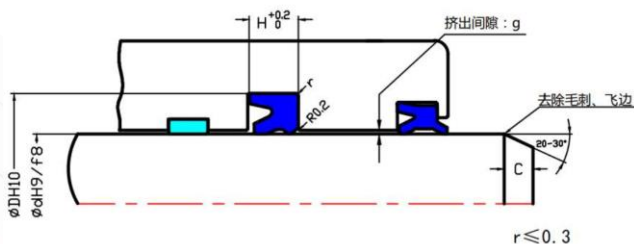


材料: PU-15594
硬度: HA 93
TR-10: -42°C
最高使用温度: 100°C
速度: 0.03~0.5m/s
工作介质: 液压油、水、醇类

- 带副唇设计，密封在沟槽内有更好的稳定性；
- 活塞杆表面应进行0.1~0.4 μ mRa的抛光；
- 耐低温材料制作，可在-50°C工况下使用；


| d(mm) | D(mm) | S(mm) | H(mm) |
|-------|-------|-------|-------|
| 14 | 20 | 5.7 | 6.3 |
| 14 | 24 | 7.3 | 8 |
| 15 | 22 | 5.7 | 6.3 |
| 16 | 24 | 5.3 | 6 |
| 16 | 24 | 5.8 | 6.3 |
| 16 | 26 | 7.3 | 8 |
| 18 | 26 | 5 | 5.7 |
| 18 | 28 | 7.3 | 8 |
| 20 | 26 | 4.9 | 5.5 |
| 20 | 28 | 5 | 5.7 |
| 20 | 30 | 6 | 7 |
| 20 | 30 | 7.3 | 8 |
| 22 | 30 | 5 | 5.7 |
| 22 | 32 | 7.3 | 8 |
| 22.4 | 30 | 5 | 5.7 |
| 25 | 33 | 5 | 5.7 |
| 25 | 33 | 5.7 | 6.3 |
| 25 | 33 | 6.5 | 7.3 |
| 25 | 35 | 7 | 8 |
| 26 | 36 | 10 | 11 |
| 28 | 35.5 | 5 | 5.7 |
| 28 | 36 | 5.3 | 6 |
| 28 | 36 | 7 | 7.5 |
| 28 | 38 | 7.3 | 8 |
| 30 | 40 | 6 | 7 |
| 30 | 40 | 7 | 7.7 |
| 30 | 40 | 10 | 11 |
| 30 | 45 | 9 | 10 |
| 30 | 45 | 10 | 11 |
| 32 | 42 | 6 | 7 |

| d(mm) | D(mm) | S(mm) | H(mm) |
|-------|-------|-------|-------|
| 32 | 42 | 7.3 | 8 |
| 32 | 42 | 10 | 11 |
| 32 | 45 | 10 | 11 |
| 35 | 45 | 6 | 7 |
| 35 | 45 | 10 | 11 |
| 35 | 47 | 16.5 | 17.5 |
| 35 | 45 | 7 | 8 |
| 35 | 50 | 9 | 10 |
| 35.5 | 45 | 6 | 7 |
| 35.5 | 50.5 | 10 | 11 |
| 36 | 46 | 7.3 | 8 |
| 36 | 51 | 10 | 11 |
| 37 | 47 | 10 | 11 |
| 38 | 48 | 8 | 9 |
| 38 | 48 | 6 | 7 |
| 40 | 50 | 6 | 7 |
| 40 | 50 | 7.3 | 8 |
| 40 | 50 | 10 | 11 |
| 40 | 52 | 8 | 9 |
| 40 | 55 | 9 | 10 |
| 40 | 55 | 11.4 | 12.5 |
| 42 | 52 | 6 | 7 |
| 42 | 52 | 8 | 9 |
| 43 | 53 | 7.3 | 8 |
| 45 | 53 | 5.6 | 6.3 |
| 45 | 53 | 7.3 | 8 |
| 45 | 55 | 6 | 7 |
| 45 | 55 | 7.3 | 8 |
| 45 | 55 | 8 | 9 |
| 45 | 55 | 10 | 11 |

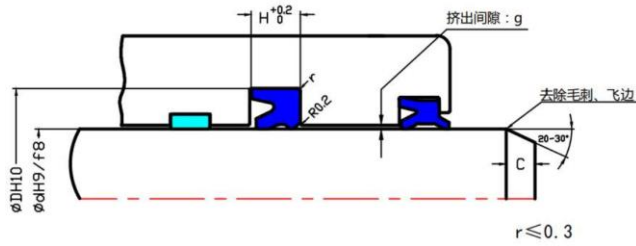

| d(mm) | D(mm) | S(mm) | H(mm) |
|-------|-------|-------|-------|
| 45 | 60 | 9 | 10 |
| 45 | 60 | 11.4 | 12.5 |
| 46 | 56 | 10 | 11 |
| 48 | 56 | 11.5 | 12.5 |
| 50 | 58 | 8 | 9 |
| 50 | 58 | 9 | 10 |
| 50 | 60 | 6 | 7 |
| 50 | 60 | 7.3 | 8 |
| 50 | 60 | 10 | 11 |
| 50 | 65 | 9 | 10 |
| 50 | 65 | 10 | 11 |
| 50 | 65 | 11.4 | 12.5 |
| 50 | 70 | 9 | 10 |
| 50 | 70 | 12 | 13 |
| 52 | 62 | 10 | 11 |
| 53 | 63 | 6 | 7 |
| 55 | 65 | 6 | 7 |
| 55 | 65 | 10 | 11 |
| 55 | 67 | 10 | 11 |
| 55 | 68 | 10 | 11 |
| 55 | 70 | 9 | 10 |
| 55 | 75 | 12 | 13 |
| 56 | 66 | 10 | 11 |
| 56 | 71 | 11.4 | 12.5 |
| 60 | 68 | 13 | 14 |
| 60 | 70 | 6 | 7 |
| 60 | 70 | 7.3 | 8 |
| 60 | 70 | 10 | 11 |
| 60 | 71 | 7 | 8 |
| 60 | 75 | 9 | 10 |
| 60 | 75 | 10 | 11 |
| 60 | 80 | 12 | 13 |
| 63 | 71 | 8 | 9 |
| 63 | 73 | 6 | 7 |
| 63 | 73 | 10 | 11 |
| 63 | 78 | 10 | 11 |
| 63 | 78 | 11.4 | 12.5 |
| 64 | 72 | 9.1 | 10 |
| 65 | 73 | 11.5 | 12.5 |
| 65 | 75 | 6 | 7 |
| 65 | 75 | 12 | 13 |
| 65 | 78 | 10 | 11 |
| 65 | 80 | 9 | 10 |
| 65 | 85 | 11.4 | 12.5 |
| 67 | 77 | 6 | 7 |
| 68 | 78 | 12 | 13 |
| 70 | 80 | 6 | 7 |
| 70 | 80 | 12 | 13 |
| 70 | 83 | 10 | 11 |
| 70 | 85 | 9 | 10 |

| d(mm) | D(mm) | S(mm) | H(mm) |
|-------|-------|-------|-------|
| 70 | 85 | 11.4 | 12.5 |
| 70 | 90 | 12 | 13 |
| 75 | 85 | 6 | 7 |
| 75 | 88 | 10 | 11 |
| 75 | 90 | 9 | 10 |
| 75 | 90 | 10 | 11 |
| 75 | 95 | 12 | 13 |
| 78 | 86 | 11.5 | 12.5 |
| 80 | 88 | 11.5 | 12.5 |
| 80 | 90 | 6 | 7 |
| 80 | 90 | 12 | 13 |
| 80 | 93 | 10 | 11 |
| 80 | 95 | 9 | 10 |
| 80 | 95 | 11.4 | 12 |
| 80 | 100 | 12 | 13 |
| 85 | 93 | 11.5 | 12.5 |
| 85 | 100 | 9 | 10 |
| 85 | 100 | 10 | 11 |
| 85 | 100 | 12 | 13 |
| 85 | 105 | 12 | 13 |
| 90 | 98 | 11.5 | 12.5 |
| 90 | 100 | 9 | 10 |
| 90 | 105 | 10 | 11 |
| 90 | 105 | 11.4 | 12.5 |
| 90 | 110 | 12 | 13 |
| 90 | 105 | 9 | 10 |
| 92 | 107 | 11.4 | 12.5 |
| 95 | 105 | 11.4 | 12.5 |
| 95 | 110 | 9 | 10 |
| 95 | 110 | 10 | 11 |
| 95 | 110 | 11.8 | 13 |
| 95 | 115 | 12 | 13 |
| 97 | 105 | 13 | 14 |
| 100 | 108 | 12 | 13 |
| 100 | 110 | 11.4 | 12.5 |
| 100 | 115 | 9 | 10 |
| 100 | 115 | 10 | 11 |
| 100 | 120 | 11.8 | 13 |
| 100 | 120 | 14.5 | 16 |
| 105 | 113 | 11.5 | 12.5 |
| 105 | 120 | 9 | 10 |
| 107 | 115 | 11.5 | 12.5 |
| 110 | 125 | 9 | 10 |
| 110 | 125 | 14.5 | 16 |
| 110 | 130 | 11.8 | 13 |
| 110 | 130 | 14.5 | 16 |
| 112 | 125 | 9 | 10 |
| 115 | 125 | 11 | 12 |
| 118 | 126 | 13 | 14 |
| 120 | 130 | 11.4 | 12.5 |


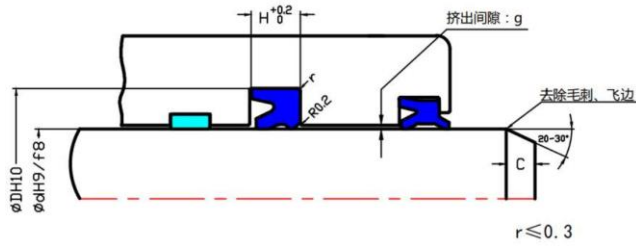


| d(mm) | D(mm) | S(mm) | H(mm) |
|-------|-------|-------|-------|
| 120 | 130 | 14 | 15 |
| 120 | 135 | 9 | 10 |
| 120 | 140 | 12 | 13 |
| 124 | 134 | 6 | 7 |
| 125 | 133 | 11.5 | 12.5 |
| 125 | 135 | 11.4 | 12.5 |
| 125 | 140 | 9 | 10 |
| 125 | 145 | 12 | 13 |
| 128 | 140 | 9.1 | 10 |
| 130 | 145 | 9 | 10 |
| 130 | 145 | 10 | 11 |
| 130 | 145 | 12 | 13 |
| 130 | 150 | 12 | 13 |
| 135 | 145 | 11 | 12 |
| 135 | 150 | 9 | 10 |
| 140 | 150 | 6 | 7 |
| 140 | 155 | 9 | 10 |
| 140 | 160 | 14.5 | 16 |
| 143 | 151 | 13 | 14 |
| 145 | 153 | 11.5 | 12.5 |
| 145 | 155 | 11.4 | 12.5 |
| 150 | 160 | 11.4 | 12.5 |
| 150 | 165 | 9 | 10 |
| 150 | 170 | 12 | 13 |
| 150 | 170 | 15 | 16 |
| 152 | 160 | 9.1 | 10 |
| 155 | 165 | 6 | 7 |
| 155 | 165 | 11 | 12 |
| 155 | 170 | 9 | 10 |
| 160 | 175 | 9 | 10 |
| 160 | 180 | 12 | 13 |
| 160 | 185 | 18.2 | 20 |
| 165 | 180 | 9 | 10 |

英制尺寸表 (INCH)



| d(In) | D(In) | S(In) | H(In) |
|-------|-------|-------|-------|
| 0.375 | 0.625 | 0.198 | 0.218 |
| 0.375 | 0.750 | 0.312 | 0.344 |
| 0.500 | 0.750 | 0.187 | 0.207 |
| 0.562 | 0.813 | 0.187 | 0.207 |
| 0.625 | 0.875 | 0.187 | 0.207 |
| 0.625 | 0.875 | 0.241 | 0.265 |
| 0.625 | 1.000 | 0.281 | 0.312 |
| 0.688 | 0.938 | 0.187 | 0.207 |
| 0.750 | 1.000 | 0.125 | 0.138 |
| 0.750 | 1.000 | 0.187 | 0.207 |
| 0.750 | 1.000 | 0.250 | 0.275 |
| 0.750 | 1.125 | 3.120 | 0.344 |
| 0.813 | 1.063 | 0.187 | 0.207 |
| 0.813 | 1.063 | 0.250 | 0.275 |
| 0.875 | 1.125 | 0.187 | 0.207 |

| d(In) | D(In) | S(In) | H(In) |
|-------|-------|-------|-------|
| 0.875 | 1.125 | 0.250 | 0.275 |
| 0.875 | 1.250 | 0.324 | 0.356 |
| 0.875 | 1.375 | 0.341 | 0.375 |
| 1.000 | 1.240 | 0.192 | 0.211 |
| 1.000 | 1.250 | 0.125 | 0.138 |
| 1.000 | 1.250 | 0.187 | 0.207 |
| 1.000 | 1.250 | 0.250 | 0.275 |
| 1.000 | 1.312 | 0.219 | 0.241 |
| 1.000 | 1.375 | 0.187 | 0.207 |
| 1.000 | 1.375 | 0.250 | 0.275 |
| 1.000 | 1.375 | 0.312 | 0.344 |
| 1.000 | 1.500 | 0.255 | 0.275 |
| 1.000 | 1.500 | 0.341 | 0.375 |
| 1.000 | 1.500 | 0.375 | 0.413 |
| 1.063 | 1.302 | 0.187 | 0.207 |
| 1.063 | 1.313 | 0.250 | 0.275 |
| 1.125 | 1.365 | 0.192 | 0.211 |
| 1.125 | 1.375 | 0.187 | 0.207 |
| 1.125 | 1.375 | 0.250 | 0.275 |
| 1.125 | 1.375 | 0.312 | 0.344 |
| 1.125 | 1.399 | 0.192 | 0.211 |
| 1.125 | 1.500 | 0.312 | 0.344 |
| 1.125 | 1.562 | 0.325 | 0.360 |
| 1.125 | 1.625 | 0.250 | 0.275 |
| 1.125 | 1.750 | 0.397 | 0.437 |
| 1.187 | 1.562 | 0.250 | 0.275 |
| 1.250 | 1.500 | 0.187 | 0.207 |
| 1.250 | 1.500 | 0.250 | 0.275 |
| 1.250 | 1.625 | 0.187 | 0.207 |
| 1.250 | 1.625 | 0.227 | 0.250 |
| 1.250 | 1.625 | 0.250 | 0.275 |
| 1.250 | 1.625 | 0.312 | 0.344 |
| 1.250 | 1.750 | 0.250 | 0.275 |
| 1.250 | 1.750 | 0.375 | 0.413 |
| 1.250 | 1.875 | 0.397 | 0.437 |
| 1.375 | 1.625 | 0.187 | 0.207 |
| 1.375 | 1.625 | 0.250 | 0.275 |
| 1.375 | 1.687 | 0.219 | 0.241 |
| 1.375 | 1.750 | 0.187 | 0.207 |
| 1.375 | 1.750 | 0.312 | 0.344 |
| 1.375 | 1.875 | 0.375 | 0.413 |
| 1.375 | 2.000 | 0.397 | 0.437 |
| 1.437 | 1.812 | 0.312 | 0.344 |
| 1.500 | 1.750 | 0.250 | 0.275 |
| 1.500 | 1.875 | 0.187 | 0.207 |
| 1.500 | 1.875 | 0.250 | 0.275 |
| 1.500 | 1.875 | 0.312 | 0.344 |
| 1.500 | 1.875 | 0.375 | 0.413 |
| 1.500 | 2.000 | 0.250 | 0.275 |
| 1.500 | 2.000 | 0.341 | 0.375 |
| 1.500 | 2.000 | 0.375 | 0.413 |

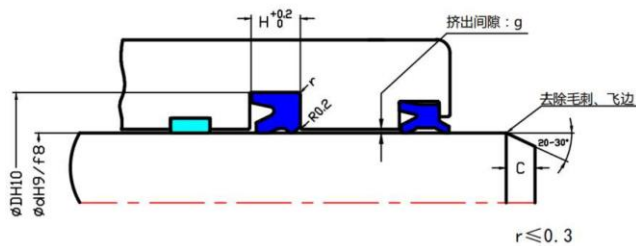

| d(In) | D(In) | S(In) | H(In) |
|-------|-------|-------|-------|
| 1.500 | 2.125 | 0.375 | 0.413 |
| 1.500 | 2.125 | 0.397 | 0.437 |
| 1.625 | 1.875 | 0.250 | 0.275 |
| 1.625 | 2.000 | 0.281 | 0.312 |
| 1.625 | 2.000 | 0.312 | 0.344 |
| 1.625 | 2.000 | 0.375 | 0.413 |
| 1.625 | 2.125 | 0.375 | 0.413 |
| 1.750 | 2.000 | 0.250 | 0.275 |
| 1.750 | 2.125 | 0.250 | 0.275 |
| 1.750 | 2.125 | 0.312 | 0.344 |
| 1.750 | 2.125 | 0.375 | 0.413 |
| 1.750 | 2.250 | 0.250 | 0.275 |
| 1.750 | 2.250 | 0.341 | 0.375 |
| 1.750 | 2.250 | 0.375 | 0.413 |
| 1.750 | 2.250 | 0.500 | 0.550 |
| 1.750 | 2.375 | 0.437 | 0.481 |
| 1.875 | 2.250 | 0.312 | 0.344 |
| 1.875 | 2.250 | 0.375 | 0.413 |
| 1.875 | 2.375 | 0.375 | 0.413 |
| 1.875 | 2.500 | 0.397 | 0.437 |
| 2.000 | 2.250 | 0.250 | 0.275 |
| 2.000 | 2.375 | 0.250 | 0.275 |
| 2.000 | 2.375 | 0.312 | 0.344 |
| 2.000 | 2.375 | 0.375 | 0.413 |
| 2.000 | 2.500 | 0.250 | 0.275 |
| 2.000 | 2.500 | 0.312 | 0.344 |
| 2.000 | 2.500 | 0.341 | 0.375 |
| 2.000 | 2.500 | 0.375 | 0.413 |
| 2.000 | 2.500 | 0.781 | 0.859 |
| 2.000 | 2.625 | 0.312 | 0.344 |
| 2.000 | 2.625 | 0.397 | 0.437 |
| 2.000 | 2.625 | 0.500 | 0.550 |
| 2.000 | 2.750 | 0.625 | 0.688 |
| 2.125 | 2.500 | 0.375 | 0.413 |
| 2.250 | 2.625 | 0.335 | 0.375 |
| 2.250 | 2.750 | 0.341 | 0.375 |
| 2.250 | 2.750 | 0.375 | 0.413 |
| 2.250 | 2.875 | 0.500 | 0.550 |
| 2.250 | 3.000 | 0.511 | 0.562 |
| 2.375 | 2.750 | 0.375 | 0.413 |
| 2.375 | 2.875 | 0.375 | 0.413 |
| 2.500 | 2.875 | 0.312 | 0.344 |
| 2.500 | 2.875 | 0.375 | 0.413 |
| 2.500 | 2.937 | 0.284 | 0.312 |
| 2.500 | 3.000 | 0.250 | 0.275 |
| 2.500 | 3.000 | 0.284 | 0.312 |
| 2.500 | 3.000 | 0.375 | 0.413 |
| 2.500 | 3.125 | 0.500 | 0.550 |
| 2.500 | 3.250 | 0.625 | 0.688 |
| 2.625 | 3.000 | 0.375 | 0.413 |

| d(In) | D(In) | S(In) | H(In) |
|-------|-------|-------|-------|
| 2.625 | 3.125 | 0.500 | 0.550 |
| 2.625 | 3.250 | 0.625 | 0.688 |
| 2.735 | 3.250 | 0.312 | 0.344 |
| 2.750 | 3.125 | 0.375 | 0.413 |
| 2.750 | 3.250 | 0.375 | 0.413 |
| 2.750 | 3.375 | 0.375 | 0.413 |
| 2.750 | 3.375 | 0.500 | 0.550 |
| 2.750 | 3.375 | 0.805 | 0.885 |
| 2.750 | 3.500 | 0.625 | 0.688 |
| 2.875 | 3.250 | 0.375 | 0.413 |
| 2.875 | 3.375 | 0.375 | 0.413 |
| 3.000 | 3.375 | 0.375 | 0.413 |
| 3.000 | 3.438 | 0.281 | 0.310 |
| 3.000 | 3.500 | 0.375 | 0.413 |
| 3.000 | 3.500 | 0.625 | 0.688 |
| 3.000 | 3.500 | 0.781 | 0.859 |
| 3.000 | 3.625 | 0.500 | 0.550 |
| 3.000 | 3.750 | 0.625 | 0.688 |
| 3.125 | 3.500 | 0.625 | 0.688 |
| 3.250 | 3.625 | 0.375 | 0.413 |
| 3.250 | 3.625 | 0.562 | 0.619 |
| 3.250 | 3.750 | 0.375 | 0.413 |
| 3.250 | 3.875 | 0.500 | 0.550 |
| 3.375 | 3.875 | 0.375 | 0.413 |
| 3.375 | 4.000 | 0.594 | 0.653 |
| 3.500 | 3.875 | 0.375 | 0.413 |
| 3.500 | 4.000 | 0.312 | 0.344 |
| 3.500 | 4.000 | 0.375 | 0.413 |
| 3.500 | 4.125 | 0.500 | 0.550 |
| 3.500 | 4.250 | 0.625 | 0.688 |
| 3.625 | 4.125 | 0.375 | 0.413 |
| 3.750 | 4.125 | 0.375 | 0.413 |
| 3.750 | 4.250 | 0.375 | 0.413 |
| 3.750 | 4.250 | 5.000 | 0.550 |
| 3.750 | 4.250 | 0.562 | 0.625 |
| 3.875 | 4.375 | 0.375 | 0.413 |
| 4.000 | 4.375 | 0.375 | 0.413 |
| 4.000 | 4.500 | 0.312 | 0.344 |
| 4.000 | 4.500 | 0.375 | 0.413 |
| 4.000 | 4.500 | 0.562 | 0.619 |
| 4.000 | 4.500 | 0.781 | 0.859 |
| 4.000 | 4.625 | 0.375 | 0.413 |
| 4.000 | 4.625 | 0.500 | 0.550 |
| 4.000 | 4.750 | 0.500 | 0.550 |
| 4.000 | 4.750 | 0.625 | 0.688 |
| 4.250 | 5.000 | 0.625 | 0.688 |
| 4.375 | 4.875 | 0.375 | 0.413 |
| 4.500 | 5.000 | 0.375 | 0.413 |
| 4.500 | 5.125 | 0.500 | 0.550 |
| 4.500 | 5.125 | 0.625 | 0.688 |

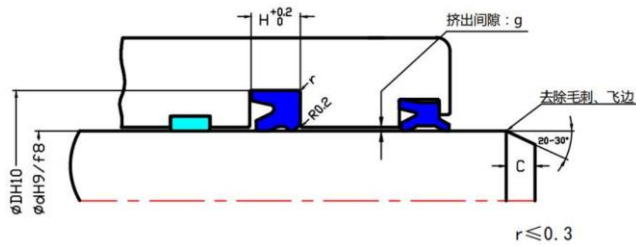

密封件与沟槽尺寸

| d(In) | D(In) | S(In) | H(In) |
|--------|--------|-------|-------|
| 4.500 | 5.250 | 0.625 | 0.688 |
| 4.625 | 5.250 | 0.625 | 0.688 |
| 4.750 | 5.125 | 0.375 | 0.413 |
| 4.750 | 5.250 | 0.625 | 0.688 |
| 0.875 | 5.375 | 0.375 | 0.413 |
| 5.000 | 5.500 | 0.375 | 0.413 |
| 5.000 | 5.500 | 0.562 | 0.619 |
| 5.000 | 5.500 | 0.781 | 0.859 |
| 5.000 | 5.531 | 0.557 | 0.619 |
| 5.000 | 5.625 | 0.500 | 0.550 |
| 5.000 | 5.750 | 0.625 | 0.688 |
| 5.125 | 5.625 | 0.562 | 0.619 |
| 5.125 | 6.000 | 0.500 | 0.550 |
| 5.375 | 5.875 | 0.625 | 0.688 |
| 5.375 | 6.000 | 0.625 | 0.688 |
| 5.500 | 6.000 | 0.375 | 0.413 |
| 5.500 | 6.000 | 0.562 | 0.619 |
| 5.500 | 6.125 | 0.312 | 0.344 |
| 5.500 | 6.250 | 0.625 | 0.688 |
| 5.625 | 6.125 | 0.375 | 0.413 |
| 6.000 | 6.500 | 0.562 | 0.619 |
| 6.000 | 6.500 | 0.781 | 0.859 |
| 6.000 | 6.531 | 0.562 | 0.619 |
| 6.000 | 6.750 | 0.625 | 0.688 |
| 6.500 | 7.250 | 0.625 | 0.688 |
| 7.000 | 7.500 | 0.562 | 0.619 |
| 7.000 | 7.500 | 0.780 | 0.859 |
| 7.000 | 7.531 | 0.562 | 0.619 |
| 7.000 | 7.750 | 0.625 | 0.688 |
| 7.500 | 8.000 | 0.375 | 0.413 |
| 7.750 | 8.500 | 0.625 | 0.688 |
| 8.000 | 8.500 | 0.375 | 0.413 |
| 8.000 | 8.500 | 0.562 | 0.619 |
| 8.000 | 8.750 | 0.625 | 0.688 |
| 8.125 | 8.625 | 0.781 | 0.859 |
| 8.500 | 9.000 | 0.375 | 0.413 |
| 9.000 | 9.500 | 0.562 | 0.619 |
| 9.250 | 10.000 | 0.625 | 0.688 |
| 9.375 | 9.875 | 0.781 | 0.859 |
| 9.750 | 10.250 | 0.375 | 0.413 |
| 10.000 | 10.500 | 0.562 | 0.619 |