




# RS-17D

## 带副唇的挤压型密封

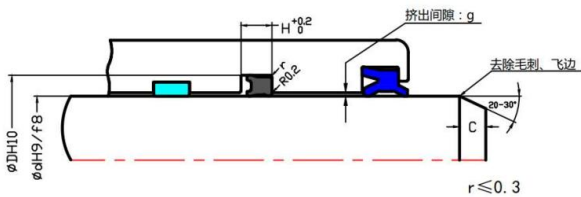


### 材料二选一

材料:	PU-15594	LND*
硬度:	HA 93	HA 95
TR-10:	-25°C	-
最高使用温度:	120°C	120°C
速度:	0.03~1m/s	
工作介质:	液压油、水、醇类	


- 活塞杆表面应进行0.1~0.4mRa的抛光
- 使用LND材料应用于氮气弹簧主密封具有良好表现

d(mm)	D(mm)	S(mm)	H(mm)
6	14	5.8	6.3
8	14	5.7	6.3
8	16	5.8	6.3
<b>11</b>	<b>16</b>	<b>3</b>	<b>3.2</b>
<b>11</b>	<b>16</b>	<b>3.2</b>	<b>3.5</b>
12	20	5.8	6.3
14	21	5	5.6
14	22	5.8	6.3
<b>15</b>	<b>21</b>	<b>3</b>	<b>3.2</b>
<b>15</b>	<b>21</b>	<b>4</b>	<b>4.5</b>
<b>16</b>	<b>22.5</b>	<b>4</b>	<b>4.5</b>
18	22	4	4.5
18	25	5	5.7
18	26	5.8	6.3
18	26	8	9
<b>20</b>	<b>26.5</b>	<b>3.6</b>	<b>4</b>
<b>20</b>	<b>28</b>	<b>5</b>	<b>5.8</b>
20	30	7	8
22	28	4.5	5.5
22	28	5.8	6.3
22	29	5	5.6
22	30	5.8	6.3
24	32	5.8	6.3
<b>25</b>	<b>31</b>	<b>3.5</b>	<b>4</b>
25	31	5	5.5
25	33	6.5	7.5
25	33	7	8
25	35	7	8
25	35	8	9
<b>28</b>	<b>35</b>	<b>4.5</b>	<b>5</b>
<b>28</b>	<b>34</b>	<b>3.2</b>	<b>3.5</b>
<b>28</b>	<b>36</b>	<b>3.5</b>	<b>4</b>


d(mm)	D(mm)	S(mm)	H(mm)
30	38	5.8	6.3
30	38	7	8
30	38	8	9
30	40	6.5	7.5
30	40	10	11
32	40	5.8	6.3
32	40	6	7
32	40	8	9
32	42	7	8
32	42	8	9
32	42	10	11
32	45	8	9
35	43	5.8	6.3
35	43	6	7
35	43	8	9
35	45	7	8
35	45	10	11
36	42	3	3.2
<b>36</b>	<b>44.5</b>	<b>5.5</b>	<b>6</b>
40	48	5.8	6.3
40	48	8	9
40	50	7	8
40	50	10	11
40	55	10	11
42	50	6	7
42	52	8	9
45	52	12	13
45	53	5.8	6.3
45	53	8	9
45	53	10	11
45	55	5.7	6.3
<b>45</b>	<b>55</b>	<b>7</b>	<b>8</b>

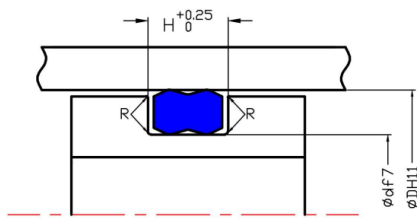

作为缸筒密封

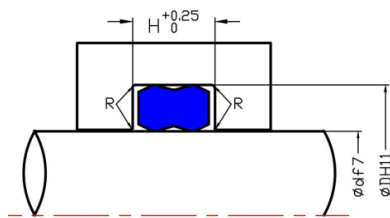

作为活塞杆密封

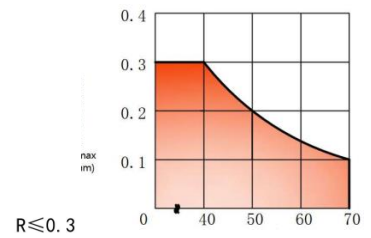

d(mm)	D(mm)	S(mm)	H(mm)
46	54	8	9
50	58	8	9
50	58	11.5	12.5
<b>50</b>	<b>60</b>	<b>7</b>	<b>8</b>
50	60	9	10
50	60	10	11
50	65	8	9
50	65	10	11
55	63	8	9
<b>55</b>	<b>65</b>	<b>7</b>	<b>8</b>
55	65	10	11
55	65	12	13
<b>56</b>	<b>64</b>	<b>8</b>	<b>9</b>
56	66	6.5	7
56	71	11.5	12.5
60	68	6.3	7
60	68	8	9
60	68	13	14
60	70	7	8
60	70	7.5	8.5
60	70	10	11
60	70	12	13
60	72	9	10
61	69	8	9
63	71	8	9
65	73	8	9
65	75	12	13
65	77	9	10
65	80	10.5	11.5
68	76	8	9
70	78	8	9
70	80	6.5	7.5
<b>70</b>	<b>80</b>	<b>7</b>	<b>8</b>
70	80	12	13
70	82	9.5	10.5
70	85	11.5	12.5
75	83	6.3	7
75	83	8	9
<b>75</b>	<b>85</b>	<b>7</b>	<b>8</b>
75	85	12	13
76	84	8	9
76	86	8	9
78	86	8	9
78	86	13	14
80	88	8	9
<b>80</b>	<b>90</b>	<b>12</b>	<b>13</b>
80	92	9	10
80	95	11.5	12.5
85	93	8	9
85	95	12	13

d(mm)	D(mm)	S(mm)	H(mm)
90	98	6.3	7
90	98	8	9
90	100	6.5	7.5
90	105	11.5	12.5
91	99	8	9
95	103	8	9
97	105	13	14
100	108	6.5	7.5
100	108	8	9
105	113	8	9
107	115	8	9
108	116	8	9
110	125	9.5	10.5
110	125	11	12
115	123	8	9
115	130	11.3	12.3
120	128	11.5	12.5
120	135	15	16
125	133	7.5	8.5
125	133	8	9
126	134	8	9
130	145	15	16
135	143	8	9
135	150	11.5	12.5
140	15	11.5	12.5
145	153	8	9