



# SS-01


## 哑铃型静密封

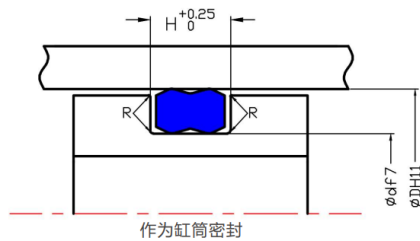

作为缸筒密封

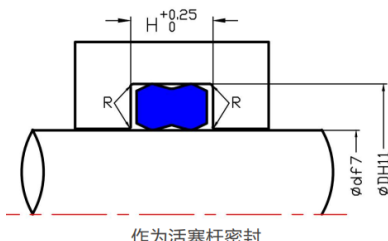

作为活塞杆密封

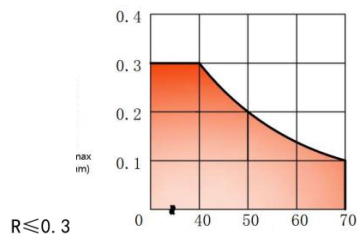


材料: PU-15594  
硬度: HA 93  
TR-10: -42°C  
最高使用温度: 100°C  
速度: 0.03~0.5m/s  
工作介质: 液压油、水、醇类


- 活塞杆表面应进行0.1~0.4mRa的抛光
- 在速度 < 0.5m/s的工况下, 采用PU作为滑环比传统PTFE有更好的密封性

D(mm)	d(mm)	S(mm)	H(mm)
20	14.5	3	3.5
20	15.5	3	3.5
20	16	5	5.8
20	16.6	3.8	4.4
20	16.6	3.1	3.6
20	17.4	3	3.4
20	17.4	3.3	3.8
20	17.6	3.1	3.6
20.5	17.2	4.4	5
20.62	17.8	3	3.5
21	17.6	3.8	4.4
21	18.6	3.1	3.6
21.5	18.1	3.8	4.4
21.5	18.7	3	3.5
21.5	19.1	2.3	2.6
22	17	3.9	4.5
22	17.5	2.9	3.6
22	17.5	3	3.5
22	19.4	1.9	2.2
22	19.4	3.3	3.8
22	19.6	3.1	3.6
22.8	18	3	3.5
23	19.6	3.8	4.4
23	20	3.3	3.8
23	20.6	3.1	3.6
23.2	17	3.9	4.5
23.6	19	4.8	5.5
24	17.8	3.9	4.5
24	20	4.2	4.8
24	21.4	3.3	3.8


D(mm)	d(mm)	S(mm)	H(mm)
24	21.6	3.1	3.6
25	20.5	3	3.5
25	20.5	4.4	5
25	22.4	3.3	3.8
25	22.6	2.1	2.4
25	21	4.4	5
25.2	19	3.9	4.5
26	19.8	3.9	4.5
26	21.8	3	3.5
26	22	4.4	5
26	22	3.8	4.4
26	23.1	3	3.5
26.56	22	3	3.5
26.8	22	4.7	5.4
27	22.8	3	3.5
28	23	4.6	5.3
28	23.8	3	3.5
28	23.8	4.6	5.3
28	24	4.4	5
28.5	24	3	3.5
28.6	25.6	3.1	3.6
29	24.5	3	3.5
29	24.9	4.4	5
30	16	9.6	11
30	25	4.35	4.8
30	25.1	3.8	4.4
30	25.4	4.7	5.4
30	26	4.4	5
32	27.4	4.7	5.4
32	27.5	3	3.5

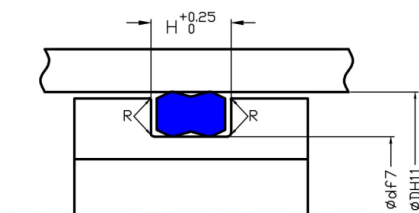

作为缸筒密封

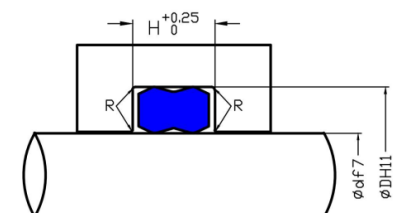


作为活塞杆密封

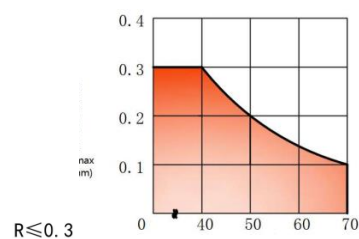


D(mm)	d(mm)	S(mm)	H(mm)
32	28	4.4	5
32.6	28.4	3.1	3.6
33	20	3.1	3.6
33.6	27.5	3.9	4.5
34	28.4	4.6	5.3
34	29	3.9	4.5
34	30	4.4	5
34	31.1	3.1	3.6
34.2	28	3.9	4.5
34.3	28	5.7	6.5
34.5	30	3	3.5
35	26.6	5.7	6.5
35	28.8	3.9	4.5
35	30	4.35	4.8
35	30.4	4.4	5
35	30.5	3	3.5
35	31	4.4	5
36	30.4	3.9	4.5
36	32	4.4	5
36	32	5.4	6.2
36	33.2	3.1	3.6
36	33.2	4.1	4.75
36.2	30	3.9	4.5
36.3	30	5.7	6.5
37	30.8	3.9	4.5
37.2	31	3.9	4.5
38	31.8	3.9	4.5
38	32.4	3.9	4.5
38	32.4	4.6	5.3
38	35.2	4.1	4.75
38.6	34	3.5	4
39	33.4	4.6	5.3
39.2	33	3.9	4.5
39.5	35	3	3.5
40	33.8	3.9	4.5
40	33.8	5.2	6
40	34.4	4.2	4.8
40	35	4.35	4.8
40	35.2	4.7	5.4
40	35.4	4.7	5.4
40	35.5	3	3.5
40	36	4.4	5
40	34.4	4.6	5.3
40.6	35.1	4	4.6
40.7	34.6	3.9	4.5
41	35.1	5.7	6.5
41.2	35	3.9	4.5
42	35.8	3.9	4.5
42	36.4	4.2	4.8
42	38	2.8	3.2


D(mm)	d(mm)	S(mm)	H(mm)
42	38	4.4	5
42.8	38	5.9	6.8
43	37.4	4.6	5.3
43.4	37.8	5.4	6.2
44.45	38.45	4.6	5.3
45	35.8	8.4	9.7
45	40	4.35	4.8
45	41	4.4	5
45	39.4	4.6	5.3
45.6	41	3.5	4
46	39.8	3.9	4.5
46.2	40	3.9	4.5
47	42	4.7	5.4
47.1	44	2.2	2.5
48	42.3	4.6	5.3
48	42.6	5.4	6.2
48	43	3.1	3.6
48	44.9	2.2	2.5
48.5	44	3	3.5
49	44.5	3	3.5
49.2	43	3.9	4.5
50	40.8	8.4	9.7
50	43.8	3.9	4.5
50	43.8	5.2	6
50	43.8	4.9	5.6
50	44.4	4.6	5.3
50	44.6	5.4	6.2
50	45	4.35	4.8
50	45.4	4.7	5.4
50	45.4	3.4	3.9
50	47.5	3.1	3.6
50	46	4.4	5
50.4	41	8.3	9.5
50.5	46	3	3.5
50.8	45.2	4.6	5.3
51	46.5	3	3.5
51	46.5	4.4	5
52	42.6	8.3	9.5
52	46.6	5.4	6.2
53	48	3.1	3.6
53	48	4.7	5.4
54	47.8	3.9	4.5
54.2	48	3.9	4.5
54.4	48.7	4.6	5.3
55	45.8	8.5	9.8
55	49.6	5.4	6.2
55	49.9	4.6	5.3
55	50	4.35	4.8
55	50	5.8	6.7
55	51	3.1	3.6

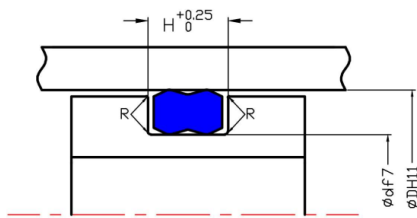

作为缸筒密封

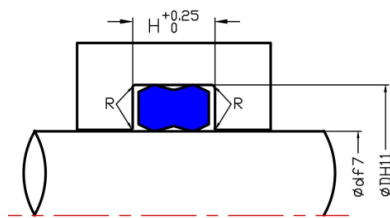


作为活塞杆密封

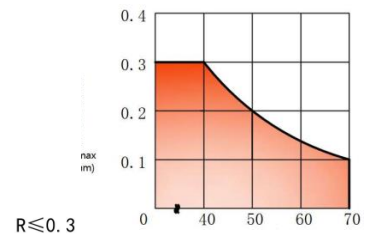


D(mm)	d(mm)	S(mm)	H(mm)
55	49.4	4.6	5.3
57	52.2	3.6	4.1
57.1	54	2.2	2.5
57.15	51.15	4.6	5.3
58	50	7.8	9
58	54.9	2.2	2.5
58.2	52	3.9	4.5
60	50.8	8.4	9.7
60	53.8	3.9	4.5
60	53.8	5.2	6
60	54.3	5	5.8
60	54.4	5	5.8
60	54.6	5.4	6.2
60	55	4.35	4.8
60	55	4.6	5.3
60	55.9	3.8	4.4
60	50.6	8.3	9.5
60	51.4	7.8	9
60	51.6	7.5	8.6
60	54.4	4.6	5.3
60.2	54	3.9	4.5
60.7	55	4.6	5.3
61	54.8	3.9	4.5
61	56	3.9	4.5
61	56.5	3	3.5
61	56.5	4.4	5
61.5	56	2.4	2.8
61.5	56	3.5	4
61.5	57	4.4	5
62	55.8	3.9	4.5
62	57.5	4.4	5
62.2	56	3.9	4.5
63	53.8	8.4	9.7
63	56.6	5.6	6.4
63	57.4	4.2	4.8
63	57.6	5.4	6.2
63	58	4.35	4.8
63	58.4	4.5	5.5
63	58.4	4.7	5.4
63	53.6	8.3	9.5
63	54.4	7.8	9
63	54.6	7.5	8.6
63	57.4	4.6	5.3
63.2	57	3.9	4.5
63.5	57.5	4.6	5.3
64	57.8	3.9	4.5
64.5	59	4	4.6
64.5	60	4.4	5
65	58.8	3.9	4.5
65	58.8	5.7	6.5


D(mm)	d(mm)	S(mm)	H(mm)
65	59.4	4.4	5
65	59.6	5.4	6.2
65	60	4.35	4.8
65	60	4.4	5
65	60.5	4.4	5
65	56.4	7.8	9
65	56.6	7.5	8.6
65.2	59	3.9	4.5
65.2	59	5.7	6.5
66	60.4	4.4	5.1
68	62.7	4.4	5
69.6	65	3.4	3.9
70	60	7.6	8.4
70	63.8	3.9	4.5
70	63.8	5.2	6
70	64.6	5.2	6
70	64.6	5.4	6.2
70	65	4.35	4.8
70	66.4	5.4	6.2
70	60.6	8.3	9.5
70	61.4	7.8	9
70	61.6	7.5	8.6
70	64.4	4.6	5.3
70.2	64	3.9	4.5
71.5	66	4	4.6
72	66.4	4.4	5
72.5	68	3	3.5
72.6	68	3.3	3.8
73	68.5	3	3.5
73.5	70	4.4	5
74.6	70	3.3	3.8
75	65	7.6	8.4
75	65.8	8.4	9.7
75	69.4	4.6	5.3
75	69.6	5.4	6.2
75	70	4.35	4.8
75	65.6	8.3	9.5
75	66.4	7.8	9
75	66.6	7.5	8.6
75.6	70	4.6	5.3
76.2	70.2	4.6	5.3
76.6	72	4.2	4.8
77	70.8	5.4	6.2
78	73	3.9	4.5
78	73	4.4	5
78.4	69	8.3	9.5
79.2	73	3.9	4.5
79.2	73	5.7	6.5
80	70	7.6	8.4
80	70.6	8.3	9.5

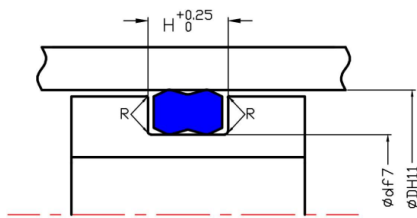

作为缸筒密封

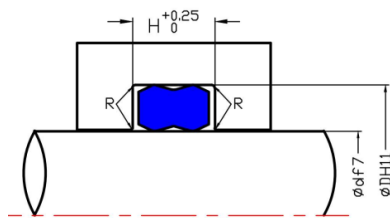


作为活塞杆密封

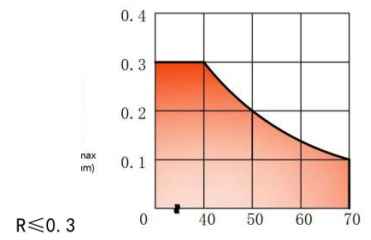


D(mm)	d(mm)	S(mm)	H(mm)
80	70.8	7.8	9
80	70.8	8.4	9.7
80	73.6	5.6	6.4
80	73.8	3.9	4.5
80	73.8	5.7	6.5
80	73.8	6	6.9
80	73.8	5.2	6
80	74.4	4.6	5.3
80	74.6	5.4	6.2
80	75	4.35	4.8
80	75.4	4.5	5.5
80	75.4	4.7	5.4
80	76	3.1	3.6
80	71.4	7.8	9
80	71.6	7.5	8.6
80.6	76	5.6	6.4
81	74.8	3.9	4.5
81	74.8	5.2	6
82.2	76	3.9	4.5
83	76.8	3.9	4.5
84.7	78.58	4.3	4.9
85	75	7.6	8.4
85	78.5	5.6	6.4
85	79.4	4.6	5.3
85	79.6	5.4	6.2
85	80	4.35	4.8
85	75.6	8.3	9.5
85	75.8	8.4	9.7
85	76.4	7.8	9
85	76.6	7.5	8.6
85.1	80.5	3.4	3.9
85.2	78.9	5.2	6
85.4	76	8.3	9.5
86	76.6	8.3	9.5
88	82.4	6.1	7
88.2	82	3.9	4.5
89	82.8	3.9	4.5
89	82.8	5.2	6
89.4	80	6.1	7
90	80	7.6	8.4
90	80.6	6.1	7
90	80.6	7.8	9
90	81.4	7.8	9
90	83	5.5	6.5
90	83	5.7	6.5
90	84.4	4.2	4.8
90	85	4.35	4.8
90	85.4	4.5	5.5
90	80.6	8.3	9.5
90	80.8	8.4	9.7

D(mm)	d(mm)	S(mm)	H(mm)
90	81.6	7.5	8.6
90	84.4	4.6	5.3
90.5	85.5	4.4	5
91.5	86	4	4.6
92	86.5	4.2	4.8
93	87.4	4.6	5.3
93.5	89	3	3.5
94	89.5	3	3.5
94	89.5	3.3	3.8
94.4	85	8.3	9.5
95	85	7.6	8.4
95	85.6	8.3	9.5
95	86.4	7.8	9
95	88.8	3.9	4.5
95	89.4	5.4	6.2
95	90	4.35	4.8
95	85.8	8.4	9.7
95	86.6	7.5	8.6
95	89.4	4.6	5.3
95.2	89	3.9	4.5
96	88	5.7	6.6
97	91.4	4.2	4.8
98.2	92	3.9	4.5
99	92.8	3.9	4.5
99	92.8	5.2	6
99.4	90	6.1	7
99.4	90	8.3	9.5
100	90	7.6	8.4
100	90.6	8.3	9.5
100	90.6	6.1	7
100	90.6	7.8	9
100	90.8	8.4	9.7
100	91.4	6.1	7
100	91.4	7.8	9
100	91.6	7.5	8.6
100	93.8	6	6.9
100	94.3	4.6	5.3
100	95	4.35	4.8
100	94.4	4.6	5.3
101.2	95	5.7	6.5
101.4	92	8.3	9.5
102	92.6	8.3	9.5
102	95.8	5.7	6.5
102	95.8	3.9	4.5
102	95.8	5.4	6.2
102.5	96.6	4.8	5.5
104	99.5	3.3	3.8
105	95	7.6	8.4
105	96.4	7.8	9
105	100	4.35	4.8




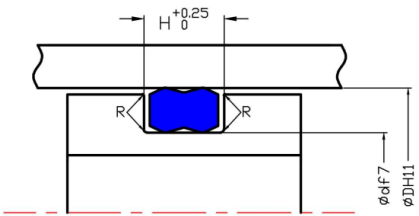

作为缸筒密封

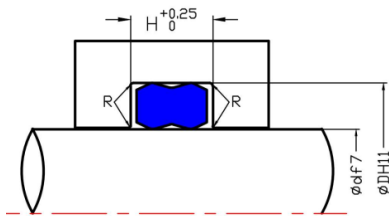


作为活塞杆密封

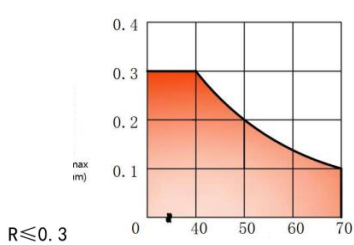


D(mm)	d(mm)	S(mm)	H(mm)
105	95.8	8.4	9.7
105	96.6	7.5	8.6
105	99.4	4.6	5.3
106	101	4.4	5
107.8	101.5	5.3	6.1
108	98.9	6.3	7.2
110	100	7.6	8.4
110	100.8	8.4	9.7
110	101.4	7.8	9
110	104.5	3.9	4.5
110	105	4.35	4.8
110	100.6	8.3	9.5
110	101.6	7.5	8.6
110	104.4	4.6	5.3
111	101.7	7.4	8.5
111	103	5.7	6.6
111	105	5.7	6.5
112	106.2	5.2	6
112.5	108	3	3.5
113	107.2	5.2	6
113	107.4	4.6	5.3
113	108.5	3	3.5
113.4	104	8.3	9.5
114	107.8	5.4	6.2
115	105	7.6	8.4
115	105.6	8.3	9.5
115	106.4	7.8	9
115	106.6	7.5	8.6
115	108	4	4.6
115	110	4.35	4.8
115	105.8	8.4	9.7
115	109.4	4.6	5.3
116	106.7	7.4	8.5
116	110	5.7	6.5
119.4	110	8.3	9.5
120	110	7.6	8.4
120	110.6	8.3	9.5
120	111.4	7.8	9
120	115	4.35	4.8
120	110.8	8.4	9.7
120	111.6	7.5	8.6
120	114.4	4.6	5.3
120.25	115.5	3.7	4.2
123.2	117	3.9	4.5
123.4	114	8.3	9.5
124	117.8	3.9	4.5
125	115	7.6	8.4
125	115.6	8.3	9.5
125	115.8	8.4	9.7
125	116.4	7.8	9


D(mm)	d(mm)	S(mm)	H(mm)
125	116.6	7.5	8.6
125	120	4.35	4.8
125	119.4	4.6	5.3
126.4	117	8.3	9.5
128	118.6	8.3	9.5
130	120	7.6	8.4
130	121.4	7.8	9
130	125	4.35	4.8
130	120.6	8.3	9.5
130	120.8	8.4	9.7
130	121.6	7.5	8.6
131	125.2	5.2	6
135	125	7.6	8.4
135	126.4	7.8	9
135	130	4.35	4.8
135	125.6	8.3	9.5
135	125.8	8.4	9.7
135	126.6	7.5	8.6
140	128.4	10.7	12.3
140	130	7.6	8.4
140	130.8	8.2	9.7
140	131.4	7.8	9
140	131.6	7.5	8.6
140	135	4.35	4.8
140	130.6	8.3	9.5
142.2	130	8.3	9.5
143	130.8	8.3	9.5
145	132.8	8.3	9.5
145	135	7.6	8.4
145	140	4.35	4.8
145	133.4	10.7	12.3
145	135.6	8.3	9.5
145	135.8	8.4	9.7
145	136.4	7.8	9
145	136.6	7.5	8.6
146	140.2	3.9	4.5
150	138.4	10.8	12.4
150	140	7.6	8.4
150	140.8	8.4	9.7
150	141.6	7.5	8.6
150	145.8	7.8	9
150	140.6	8.3	9.5
150	141.4	7.8	9
151	145	5.2	6
152	143	7.8	9
155	143.4	10.7	12.3
155	145.6	8.3	9.5
155	145.8	8.4	9.7
155	146.4	7.8	9
155	146.6	7.5	8.6

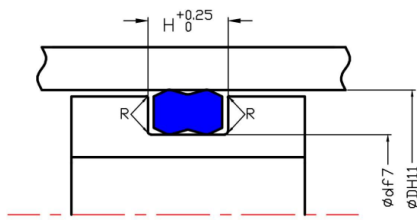

作为缸筒密封

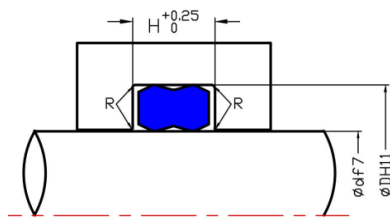

作为活塞杆密封

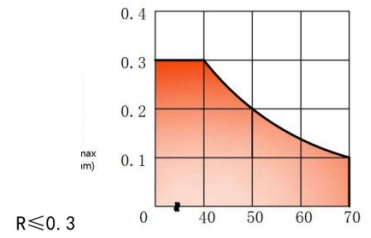

D(mm)	d(mm)	S(mm)	H(mm)
155.5	144	9.1	10.5
160	148.4	10.7	12.3
160	150	7.6	8.4
160	150.8	8.2	9.7
160	150.8	8.4	9.7
160	154.4	3.1	3.6
160	150.6	8.3	9.5
160	151.4	7.8	9
160	151.6	7.5	8.6
165	153.4	10.7	12.3
165	155.8	8.4	9.7
165	156.6	7.5	8.6
165	155.6	8.3	9.5
165	156.4	7.8	9
170	158.4	10.7	12.3
170	160	7.6	8.4
170	160.8	8.4	9.7
170	160.6	8.3	9.5
170	161.4	7.8	9
170	161.6	7.5	8.6
171	165	5.2	6
175	166.4	7.8	9
175	163.4	10.7	12.3
175	165.6	8.3	9.5
175	165.8	8.4	9.7
175	166.6	7.5	8.6
179.5	168	9.1	10.5
180	168.4	10.7	12.3
180	170	7.6	8.4
180	170.8	8.2	9.7
180	170.8	8.4	9.7
180	171.6	7.5	8.6
180	170.6	8.3	9.5
180	171.4	7.8	9
185	173.4	10.7	12.3
185	175.8	8.4	9.7
190	178.4	10.7	12.3
190	180	7.6	8.4
190	180.8	8.4	9.7
191	185	5.2	6
195	183.4	10.7	12.3
195	185.8	8.4	9.7
200	188.4	10.7	12.3
200	190	7.6	8.4
200	190.8	8.2	9.7
200	191.6	7.5	8.6
205	193.4	10.7	12.3
210	200	7.6	8.4
210	200.8	7.8	9
210	198.4	10.7	12.3

D(mm)	d(mm)	S(mm)	H(mm)
213	207	5.2	6
215	203.4	10.7	12.3
220	210	7.6	8.4
220	208.4	10.7	12.3
225	213	9.5	10.9
225	213.4	10.8	12.4
229	217.4	10.4	12
230	220	7.6	8.4
230	218.4	10.7	12.3
235	223.4	10.7	12.3
240	230	7.6	8.4
240	228.4	10.7	12.3
240.5	233.5	7.8	9
244	231	7.4	8.5
245	233.4	10.7	12.3
250	238	9.5	10.9
250	238.4	10.7	12.3
250	240	7.6	8.4
250	240.8	8.4	9.7
255	243.4	10.7	12.3
260	250	7.6	8.4
260	248.4	10.7	12.3
265	253.4	10.7	12.3
270	258.4	10.7	12.3
270	260	7.6	8.4
272	262	8.3	9.5
275	263.4	10.7	12.3
280	268	9.2	10.9
280	268.4	10.8	12.4
280	270	7.6	8.4
285	273.4	10.7	12.3
290	280	7.6	8.4
290	278.4	10.7	12.3
295	283.4	10.7	12.3
300	290	7.6	8.4
300	288.4	10.7	12.3
303	293	8.3	9.5